

BOBBY® FLOAT VALVE ASSEMBLIES


THE BOBBY® VALVE is a Miniature Float Valve that has been a standard of reliability in the industry for many years; Custom Designed for various applications. Bobby® Valves are supplied with Buna-N Plunger and Polypropylene Float suitable for 175°F. Standard orifice size 1/8". "BK" valves packed 100 per carton. Valves packed 10 per box/100 per carton, delete "BK" suffix and add \$1.00 to list.

BOBBY® BRASS FLOAT VALVE SERIES

- All Brass Body with Stainless Steel Seat


RM66 ASSEMBLY w/STEM & FLOAT

LIST EACH	PART NUMBER	INLET CONNECTION	OVERALL LENGTH	FLOW CAPACITY		MAX. INLET PRESSURE	WEIGHT PER 100 PCS
				35 PSI	85 PSI		
\$4.24	RM66BK	1/4" COMP	9-3/4"	1.31 GPM	2.25 GPM	125 PSI	18

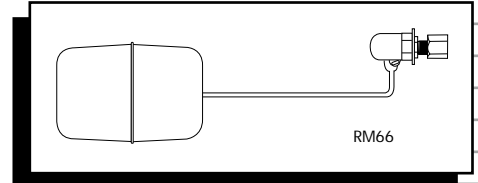


RM71 ASSEMBLY w/STEM & FLOAT

LIST EACH	PART NUMBER	INLET CONNECTION	OVERALL LENGTH	FLOW CAPACITY		MAX. INLET PRESSURE	WEIGHT PER 100 PCS
				35 PSI	85 PSI		
\$3.96	RM71BK	3/8" MIP TAPPED 1/8" FIP	9-3/4"	1.31 GPM	2.25 GPM	125 PSI	23

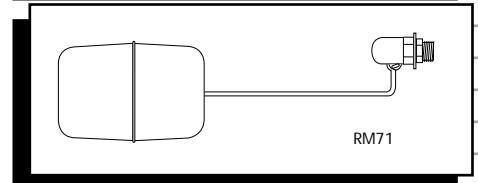


RM79 ASSEMBLY w/STEM & FLOAT

LIST EACH	PART NUMBER	INLET CONNECTION	OVERALL LENGTH	FLOW CAPACITY		MAX. INLET PRESSURE	WEIGHT PER 100 PCS
				35 PSI	85 PSI		
\$4.68	RM79BK	1/2" MIP TAPPED 1/4" FIP	9-3/4"	1.31 GPM	2.25 GPM	125 PSI	30

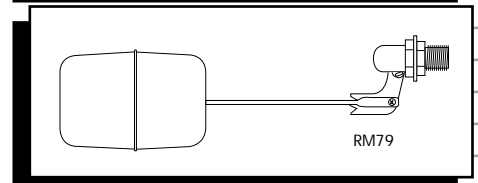

RM378 ASSEMBLY w/STEM & FLOAT

LIST EACH	PART NUMBER	INLET CONNECTION	OVERALL LENGTH	FLOW CAPACITY		MAX. INLET PRESSURE	WEIGHT PER 100 PCS
				35 PSI	85 PSI		
\$8.64	RM378BK	3/8" COMP	11-1/8"	1.31 GPM	2.25 GPM	125 PSI	36

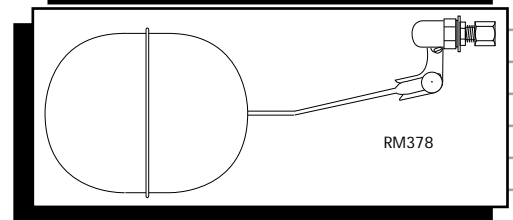


BOBBY® COMBO FLOAT VALVE SERIES

- Combination Brass and Non-Corrosive Plastic Body with Brass Inlet


RM64 ASSEMBLY w/STEM & FLOAT

LIST EACH	PART NUMBER	INLET CONNECTION	OVERALL LENGTH	FLOW CAPACITY		MAX. INLET PRESSURE	WEIGHT PER 100 PCS
				35 PSI	85 PSI		
\$2.85	RM64BK	1/4" COMP	9-3/4"	1.31 GPM	2.25 GPM	125 PSI	19

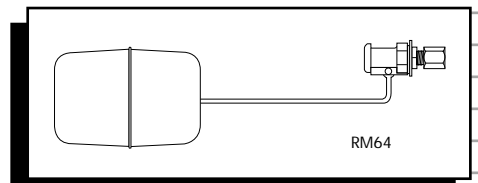


RM65 ASSEMBLY w/STEM & FLOAT

LIST EACH	PART NUMBER	INLET CONNECTION	OVERALL LENGTH	FLOW CAPACITY		MAX. INLET PRESSURE	WEIGHT PER 100 PCS
				35 PSI	85 PSI		
\$2.77	RM65BK	1/4" HOSE BARB	10"	1.31 GPM	2.25 GPM	125 PSI	19

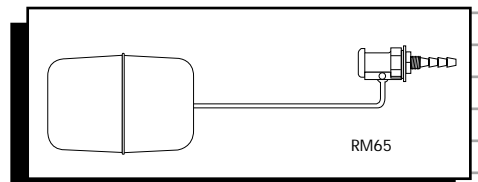


RM155 ASSEMBLY w/STEM & FLOAT

LIST EACH	PART NUMBER	INLET CONNECTION	OVERALL LENGTH	FLOW CAPACITY		MAX. INLET PRESSURE	WEIGHT PER 100 PCS
				35 PSI	85 PSI		
\$3.69	RM155BK	1/4" COMP	9-7/8"	1.31 GPM	2.25 GPM	125 PSI	30

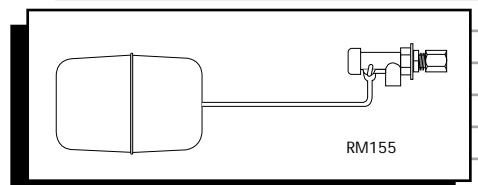

- Heavy duty 2 piece stem assemblies available on some models upon request.
- Two piece stems are special orders except on RM79, RM378 AND RM214.

BOBBY® FLOAT VALVE ASSEMBLIES

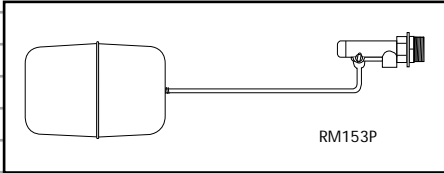


RM153P

RM153P ASSEMBLY w/STEM & FLOAT

- Celcon Body and Seat

LIST EACH	PART NUMBER	INLET CONNECTION	OVERALL LENGTH	FLOW CAPACITY		MAX. INLET PRESSURE	WEIGHT PER 100 PCS
\$5.71	RM153PBK	3/8" MIP TAPPED 1/8" FIP	9-7/8"	35 PSI	85 PSI	125 PSI	33
				1.31 GPM	2.25 GPM		

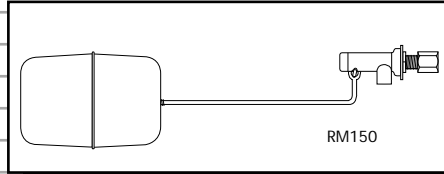


RM150

BOBBY® " T " SERIES FLOAT VALVES

- Similar Mechanical Operation as Larger BOB® VALVES
- Forged Brass Body with Stainless Steel Seat

RM150 ASSEMBLY w/STEM & FLOAT


LIST EACH	PART NUMBER	INLET CONNECTION	OVERALL LENGTH	FLOW CAPACITY		MAX. INLET PRESSURE	WEIGHT PER 100 PCS
\$6.17	RM150BK	1/4" COMP	9-7/8"	35 PSI	85 PSI	125 PSI	28
				1.31 GPM	2.25 GPM		

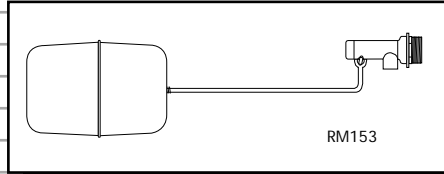

RM153

RM153 ASSEMBLY w/STEM & FLOAT

LIST EACH	PART NUMBER	INLET CONNECTION	OVERALL LENGTH	FLOW CAPACITY		MAX. INLET PRESSURE	WEIGHT PER 100 PCS
\$6.75	RM153BK	3/8" MIP TAPPED 1/8" FIP	9-7/8"	35 PSI	85 PSI	125 PSI	33
				1.31 GPM	2.25 GPM		

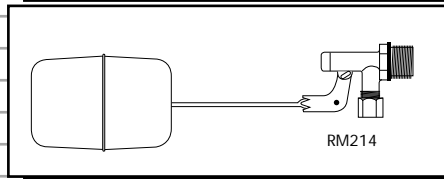


RM214

RM214 ASSEMBLY w/STEM & FLOAT

LIST EACH	PART NUMBER	INLET CONNECTION	OVERALL LENGTH	FLOW CAPACITY		MAX. INLET PRESSURE	WEIGHT PER 100 PCS
\$8.06	RM214BK	1/2" MIP with 3/8" COMP OUTLET	9-7/8"	35 PSI	85 PSI	125 PSI	38
				3 GPM	5.5 GPM		

Float Valves for small applications where caustic or sanitary conditions exist.


Stainless Steel Valve, Rod Parts and Plunger made of Viton®. Supplied with Stainless Steel or Polypropylene Float and Splash Guard.

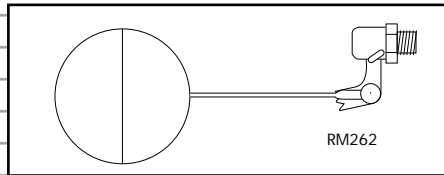

RM262

RM262 VALVE ASSEMBLY w/STAINLESS STEEL FLOAT & SPLASH GUARD

LIST EACH	PART NUMBER	INLET CONNECTION	OVERALL LENGTH	FLOW CAPACITY		MAX. INLET PRESSURE	WEIGHT PER 100 PCS
\$53.36	RM262	1/4" MIP	9"	35 PSI	85 PSI	125 PSI	12
				1.31 GPM	2.25 GPM		

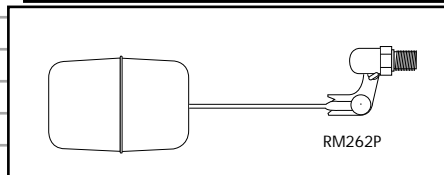

RM262P






RM262P VALVE ASSEMBLY w/POLY FLOAT & SPLASH GUARD

LIST EACH	PART NUMBER	INLET CONNECTION	OVERALL LENGTH	FLOW CAPACITY		MAX. INLET PRESSURE	WEIGHT PER 100 PCS
\$27.80	RM262P	1/4" MIP	9-3/4"	35 PSI	85 PSI	125 PSI	6
				1.31 GPM	2.25 GPM		

REPLACEMENT PARTS FOR BOBBY® VALVES

VALVE MODEL	PLUNGER	LIST EACH	PLUNGER WASHER	LIST EACH	COTTER PIN	LIST EACH	STEM	LIST EACH	MALE THREAD	CAP	LIST EACH	FLOAT	LIST EACH
RM66	101225-3	\$0.22	RS174-1	\$0.15	R481-7	\$0.36	A3865-1-6	\$1.18	8-32	101067-13	\$0.34	PF22	\$1.53
RM71	101225-3	\$0.22	RS174-1	\$0.15	R481-7	\$0.36	A3865-1-6	\$1.18	8-32	101067-13	\$0.34	PF22	\$1.53
RM79	101225-3	\$0.22	RS174-1	\$0.15	R481-7	\$0.36	C3000-1-6	\$0.92	8-32	101067-13	\$0.34	PF22	\$1.53
RM64	101225-3	\$0.22	RS174-1	\$0.15	N/A		A3865-1-6	\$1.18	8-32	N/A		PF22	\$1.53
RM65	101225-3	\$0.22	RS174-1	\$0.15	N/A		A3865-1-6	\$1.18	8-32	N/A		PF22	\$1.53
RM67	101225-3	\$0.22	RS174-1	\$0.15	R481-7	\$0.36	A3865-1-6	\$1.18	8-32	101067-13	\$0.34	PF22	\$1.53
RM150	N/A		N/A		R481-17	\$0.36	B3866-1-6	\$1.18	8-32	N/A		PF22	\$1.53
RM153	N/A		N/A		R481-17	\$0.36	B3866-1-6	\$1.18	8-32	N/A		PF22	\$1.53
RM153P	N/A		N/A		R481-39	\$0.38	B3866-1-6	\$1.18	8-32	N/A		PF22	\$1.53
RM155	N/A		N/A		R481-39	\$0.38	B3866-1-6	\$1.18	8-32	N/A		PF22	\$1.53
RM214	N/A		N/A		R481-17	\$0.36	C3000-1-6	\$0.92	8-32	N/A		PF22	\$1.53
RM378	101225-3	\$0.22	RS174-1	\$0.15	R481-7	\$0.36	105952-2	\$1.22	8-32	101067-13	\$0.34	PF45	\$3.03
RM262	101225-11	\$1.01	RS174-4	\$0.15	R481-19	\$0.50	C3000-3-6	\$2.84	8-32	106619-1	\$3.68	R1340-3	\$21.21
RM262P	101225-11	\$1.01	RS174-4	\$0.15	R481-19	\$0.50	C3000-3-6	\$2.84	8-32	101067-13	\$0.34	PF22	\$1.53

REPLACEMENT PARTS FOR BOBBY® VALVES

VALVE MODEL										
	SCREW	LIST EACH	FIBER WASHER	LIST EACH	LOCKNUT	LIST EACH	ARM	LIST EACH	PLUNGER ASSEMBLY	LIST EACH
RM66	N/A		RS145-1	\$0.14	103464-1	\$0.28	N/A		N/A	
RM71	N/A		RS145-11	\$0.15	R421-3/8	\$0.43	N/A		N/A	
RM79	RS185-1	\$0.18	RS145-9	\$0.16	R421-1/2	\$0.50	104676-15	\$1.26	N/A	
RM64	N/A		RS145-1	\$0.14	103464-1	\$0.28	N/A		N/A	
RM65	N/A		RS145-1	\$0.14	103464-1	\$0.28	N/A		N/A	
RM67	N/A		RS145-1	\$0.14	103464-1	\$0.28	N/A		N/A	
RM150	N/A		RS145-1	\$0.14	103464-1	\$0.28	N/A		105951-1	\$2.68
RM153	N/A		RS145-1	\$0.14	R421-3/8	\$0.43	N/A		105951-1	\$2.68
RM153P	N/A		RS145-1	\$0.14	R421-3/8	\$0.43	N/A		B3497-4	\$1.79
RM155	N/A		RS145-1	\$0.14	103464-1	\$0.28	N/A		B3497-1	\$1.79
RM214	RS185-1	\$0.18	*RS145-9	\$0.16	*R421-1/2	\$0.50	A3646-1	\$1.62	105951-1	\$2.68
RM378	RS191-2	\$0.37	RS145-1	\$0.14	102100-1	\$0.41	104676-15	\$1.26	N/A	
RM262	RS191-2	\$0.37	N/A		N/A		104676-17	\$2.50	N/A	
RM262P	RS191-2	\$0.37	N/A		N/A		104676-17	\$2.50	N/A	

*OPTIONAL

BOB® COPPER FLOATS & BRASS ADAPTORS

BOB® Copper Float Balls consist of two float halves soldered together using an inside lapping joint.
For open tank service only. 10" & 12" floats special order w/extended lead time.

R440 SERIES COPPER FLOATS

LIST EACH	PART NUMBER	FLOAT DIAMETER	BOUYANCY IN LBS.	FEMALE SPUD CONNECTION	WEIGHT LBS.
\$10.05	R440-2	2"	.23	1/4-20 SAE	.16
\$10.05	R440F-2	2"	.23	8-32	.16
\$11.78	R440-3	3"	.34	1/4-20 SAE	.19
\$15.46	R440-4	4"	.80	1/4-20 SAE	.38
\$20.97	R440-5	5"	1.73	1/4-20 SAE	.56
\$27.13	R440-6	6"	3.26	1/4-20 SAE	.69
\$27.13	R441-6	6"	3.26	5/16-18 SAE	.69
\$27.13	R442-6	6"	3.26	3/8-16 SAE	.69
\$38.81	R440-7	7"	5.72	3/8" FIP	1.38
\$38.81	R441-7	7"	5.72	5/16-18 SAE	1.38
\$60.74	R440-8	8"	8.03	3/8" FIP	1.94
\$60.74	R442-8	8"	8.03	3/8-16 SAE	1.94
\$122.45	R440-10	10"	16.66	1/2" FIP	3.25
\$122.45	R442-10	10"	16.66	3/8-16 SAE	3.25
\$213.59	R440-12	12"	28.38	3/4" FIP	4.50
\$213.59	R442-12	12"	28.38	3/8-16 SAE	4.50

*Float with thru-hole available upon request. Add 40% to list.

LIST EACH	PART NUMBER	FLOAT DIAMETER	LENGTH	BOUYANCY IN OZS.	FEMALE SPUD CONNECTION	WEIGHT OZS.
\$5.09	RM183 (COPPER)	1.35"	5"	4.80	1/4-20 SAE	1.55
\$6.58	RM183E (EPOXY COATED)	1.35"	5"	4.80	1/4-20 SAE	1.55
\$47.80	RM141 (COPPER)	4"	7"	35.00	1/4-20 SAE	9.58

R209 SERIES ADAPTOR

LIST EACH	PART NUMBER	THREAD COMBINATION	LIST EACH	PART NUMBER	THREAD COMBINATION
\$.75	R209-3/8X1/8	3/8" MIP X 1/8" FIP	\$.88	R209-1/2X1/4	1/2" MIP X 1/4" FIP
\$.45	R209-3/8X1/4	3/8" MIP X 1/4" FIP	\$2.01	R209-3/4X1/4	3/4" MIP X 1/4" FIP

R434 SERIES PLUG ADAPTOR

• Plug to Adapt Machine Thread Stems to Floats Having Pipe Threads

LIST EACH	PART NUMBER	THREAD COMBINATION	LIST EACH	PART NUMBER	THREAD COMBINATION
\$2.47	R434-0	1/4-20 SAE X 3/8" MIP	\$4.14	R434-9	5/16-18 SAE X 3/4" MIP
\$2.61	R434-1	5/16-18 SAE X 3/8" MIP	\$2.51	R434-11	3/8-16 SAE X 3/8" MIP
\$3.22	R434-3	1/4-20 SAE X 1/2" MIP	\$3.24	R434-13	3/8-16 SAE X 1/2" MIP
\$4.14	R434-5	1/4-20 SAE X 3/4" MIP	\$4.14	R434-15	3/8-16 SAE X 3/4" MIP
\$3.22	R434-7	5/16-18 SAE X 1/2" MIP			







R435 SERIES ADAPTOR

LIST EACH	PART NUMBER	THREAD COMBINATION	LIST EACH	PART NUMBER	THREAD COMBINATION
\$6.20	R435-1	1/4-20 SAE X 1/8" FIP	\$6.20	R435-4	1/4-20 SAE X 5/16-18 SAE FEM
\$6.84	R435-2	1/4-20 SAE X 1/4" FIP	\$6.20	R435-5	1/4-20 SAE X 3/8-16 SAE FEM
\$9.30	R435-3	1/4-20 SAE X 3/8" FIP	\$6.20	R435-6	5/16-18 SAE X 1/4-20 SAE FEM

102263 SERIES ADAPTOR

• Adapts 8-32 Stem to 1/4-20 SAE MALE for Larger Floats

LIST EACH	PART NUMBER
\$.53	102263-1 (BRASS)
\$2.43	102263-2 (STAINLESS STEEL)

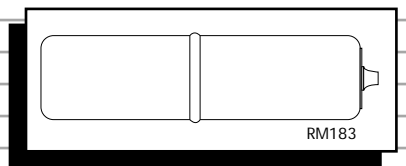


BOB® STAINLESS STEEL FLOATS & ADAPTORS

Suitable for use in corrosive fluids where
high pressure or extreme temperatures may exist.

- Floats Consist of AISI 316 Stainless Steel • 7", 10" & 12" Special Order w/Extended Lead Times.


R1340 SERIES



LIST EACH	PART NUMBER	FLOAT DIAMETER	BOUYANCY IN LBS.	FEMALE SPUD CONNECTION	WEIGHT LBS.
\$16.11	R1340-2	2"	.14	1/4-20 SAE	.16
\$16.11	R1340F-2	2"	.14	8-32	.16
\$21.21	R1340-3	3"	.21	1/4-20 SAE	.19
\$21.21	R1340F-3	3"	.21	8-32	.19
\$27.94	R1340-4	4"	.65	1/4-20 SAE	.44
\$34.65	R1340-5	5"	1.55	1/4-20 SAE	.81
\$42.86	R1340-6	6"	2.15	1/4-20 SAE	1.19
\$75.97	R1340-7	7"	3.09	3/8" FIP	1.75
\$83.81	R1340-8	8"	6.44	3/8" FIP	1.81
\$227.96	R1340-10	10"	11.63	1/2" FIP	7.19
\$386.63	R1340-12	12"	22.25	3/4" FIP	9.75

*Float with thru-hole available upon request.

106272 SERIES ADAPTOR




LIST EACH	PART NUMBER	THREAD COMBINATION	LIST EACH	PART NUMBER	THREAD COMBINATION
\$24.75	106272-1	1/4-20 SAE X 3/8" MIP	\$24.75	106272-8	1/8" FIP X 3/4" MIP
\$24.75	106272-2	3/8-16 SAE X 3/8" MIP	\$24.75	106272-9	1/4" FIP X 3/4" MIP
\$24.75	106272-3	1/8" FIP X 3/8" MIP	\$24.75	106272-10	1/2-13 SAE X 1/2" FIP
\$24.75	106272-4	3/8-16 SAE X 1/2" MIP	\$24.75	106272-11	1/4" FIP X 3/8" MIP
\$24.75	106272-5	1/8" FIP X 1/2" MIP	\$24.75	106272-12	3/8" FIP X 1/2" MIP
\$24.75	106272-6	1/4" FIP X 1/2" MIP	\$24.75	106272-13	5/16-18 SAE X 3/8" MIP
\$24.75	106272-7	3/8-16 SAE X 3/4" MIP			

BOB® POLYPROPYLENE FLOATS

BOB® Polypropylene Floats are corrosion resistant, lightweight and suitable for a broad range of destructive fluids.

Standard color is Natural. PF5, PF6, PF8 models colored black for ultra violet light protection.
Suitable for 175°F. For open tank service only.

PF5 MODEL



LIST EACH	PART NUMBER	DESCRIPTION	DIAM.	FEM. SPUD CONN.	BOUYANCY OZ.	WEIGHT OZ.
\$6.42	PF5	SPHERICAL	5"	1/4-20	34.70	2.8

PF6 MODEL


LIST EACH	PART NUMBER	DESCRIPTION	DIAM.	FEM. SPUD CONN.	BOUYANCY OZ.	WEIGHT OZ.
\$7.57	PF6	SPHERICAL	6"	1/4-20	61.00	4.5
\$7.57	PF6-7	SPHERICAL	6"	5/16-18	61.00	4.5

PF8 MODEL

LIST EACH	PART NUMBER	DESCRIPTION	DIAM.	FEM. SPUD CONN.	BOUYANCY OZ.	WEIGHT OZ.
\$8.88	PF8	SPHERICAL	8"	3/8" FIP	158.00	16.00
\$8.88	PF8-1	SPHERICAL	8"	1/4-20	158.00	16.00
\$8.88	PF8-2	SPHERICAL	8"	3/8-16	158.00	16.00
\$8.88	PF8-7	SPHERICAL	8"	5/16-18	158.00	16.00

*Float available with thru-hole upon request. Add 40% to list.

PF21 MODEL



LIST EACH	PART NUMBER	DESCRIPTION	LENGTH	WIDTH	HEIGHT	FEM. SPUD CONN.	BOUYANCY OZ.	WEIGHT OZ.
\$1.61	PF21	LUX	3-3/4"	2-5/8"	2-1/4"	8-32	9.23	1.1
\$1.71	PF21-1	LUX	3-3/4"	2-5/8"	2-1/4"	1/4-20	9.23	1.1

BOB® POLYPROPYLENE FLOATS

PF22 MODEL

LIST EACH	PART NUMBER	DESCRIPTION	LENGTH	WIDTH	HEIGHT	FEM. SPUD CONN.	BUOYANCY OZ.	WEIGHT OZ.
\$1.53	PF22	MINI LUX	3-3/4"	2-5/8"	1-7/16"	**	6.47	.75

PF23 MODEL

LIST EACH	PART NUMBER	DESCRIPTION	LENGTH	DIAM.	FEM. SPUD CONN.	BUOYANCY OZ.	WEIGHT OZ.
\$1.62	PF23	CYLINDRICAL	5-1/4"	1-1/2"	**	5.04	.73

PF24 MODEL

LIST EACH	PART NUMBER	DESCRIPTION	HEIGHT	DIAM.	FEM. SPUD CONN.	BUOYANCY OZ.	WEIGHT OZ.
\$1.53	PF24	PAN	1-3/4"	2-3/4"	8-32	5.27	.89
\$1.62	PF24-5	PAN	1-3/4"	2-3/4"	1/4-20	5.27	.89

PF26 MODEL

LIST EACH	PART NUMBER	DESCRIPTION	LENGTH	DIAM.	FEM. SPUD CONN.	BUOYANCY OZ.	WEIGHT OZ.
\$1.62	*PF26	CYLINDRICAL	3-3/4"	1-1/2"	**	3.26	.73

PF29 AND PF29S MODEL

LIST EACH	PART NUMBER	DESCRIPTION	LENGTH	DIAM.	FEM. SPUD CONN.	BUOYANCY OZ.	WEIGHT OZ.
\$1.34	PF29	CYLINDRICAL	2-5/8"	1-1/2"	8-32	2.14	.50
\$1.53	PF29-1	CYLINDRICAL	2-5/8"	1-1/2"	SLOTTED	2.14	.50
\$1.53	PF29S	CYLINDRICAL	3"	1-1/2"	8-32	2.78	.53
\$1.53	PF29S-1	CYLINDRICAL	3"	1-1/2"	SLOTTED	2.78	.53

PF30 MODEL

LIST EACH	PART NUMBER	DESCRIPTION	LENGTH	WIDTH	HEIGHT	FEM. SPUD CONN.	BUOYANCY OZ.	WEIGHT OZ.
\$1.53	PF30	FLAT RECTANGLE	2-1/4"	3-3/8"	1"	8-32	4.26	.78

PF31 MODEL

LIST EACH	PART NUMBER	DESCRIPTION	LENGTH	DIAM.	FEM. SPUD CONN.	BUOYANCY OZ.	WEIGHT OZ.
\$1.34	*PF31	CYLINDRICAL	3-3/4"	2"	8-32	5.68	.91

PF33 MODEL

LIST EACH	PART NUMBER	DESCRIPTION	LENGTH	WIDTH	HEIGHT	FEM. SPUD CONN.	BUOYANCY OZ.	WEIGHT OZ.
\$1.53	PF33	SQUARE PROFILE	2-3/4"	1-1/4"	1-1/4"	SLOTTED	1.73	.40

PF36 MODEL

LIST EACH	PART NUMBER	DESCRIPTION	HEIGHT	DIAM.	FEM. SPUD CONN.	BUOYANCY OZ.	WEIGHT OZ.
\$1.34	PF36	MICRO PAN	3/4"	2"	6-32	1.00	.40
\$1.34	PF36-1	MICRO PAN	1-7/16"	2"	6-32	2.69	.50

PF45 MODEL













LIST EACH	PART NUMBER	DESCRIPTION	LENGTH	DIAM.	FEM. SPUD CONN.	BUOYANCY OZ.	WEIGHT OZ.
\$3.03	PF45	OVAL	5"	4"	1/4-20	24.30	2.5

PF46 MODEL

LIST EACH	PART NUMBER	DESCRIPTION	LENGTH	DIAM.	FEM. SPUD CONN.	BUOYANCY OZ.	WEIGHT OZ.
\$6.31	PF46	CYLINDRICAL	6"	4"	1/4-20	39.10	4.1

*Can be weighted per requirement.


**Universal connection 6-32 or 8-32.

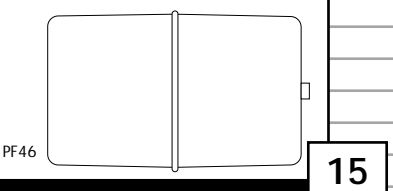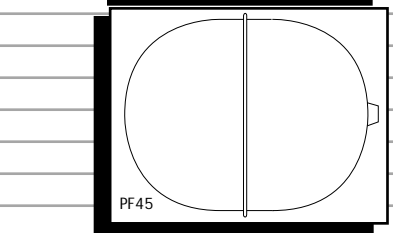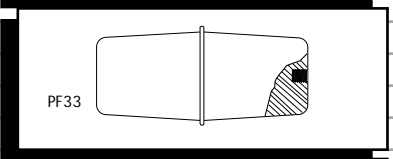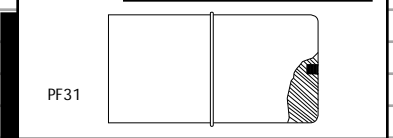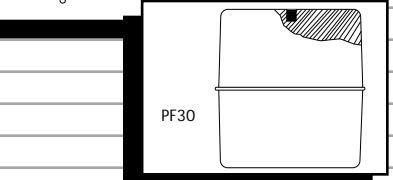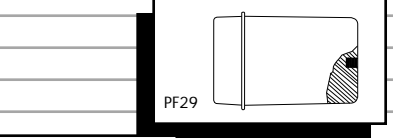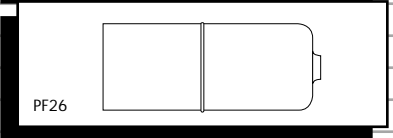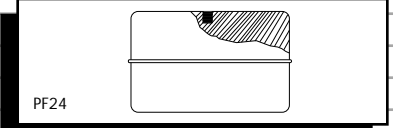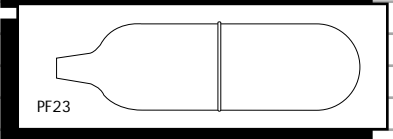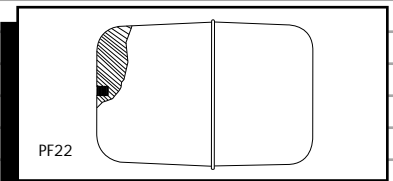

BOBBY® VALVE RESERVOIR ASSEMBLIES

FOR ICEMAKING MACHINES

• NATIONAL SANITATION FOUNDATION TESTING LABORATORY listed as Food Service Equipment • All plastic materials FDA approved • Polycarbonate Reservoir • All models - Length 5" - Height 4-1/2" - Width 2-1/2" • Packed 50 pieces per carton

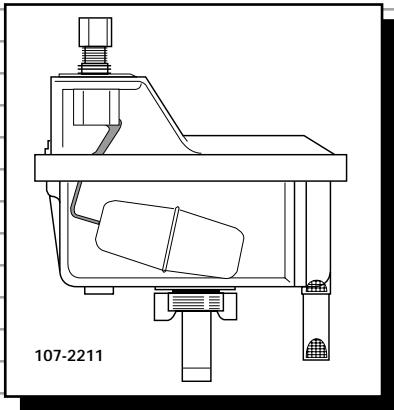


107-2211 ASSEMBLY

LIST EACH	PART NUMBER	VERTICAL INLET CONNECTION	FLOW CAPACITY AT 50 PSI	WEIGHT PER EACH
\$25.84	107-2211	1/4" COMP. NUT BRASS BODY	.52 GPM	.5 LBS

107P-2211 ASSEMBLY

LIST EACH	PART NUMBER	VERTICAL INLET CONNECTION	FLOW CAPACITY AT 50 PSI	WEIGHT PER EACH
\$24.61	107P-2211	1/4" COMP. NUT CELCON BODY	.52 GPM	.5 LBS

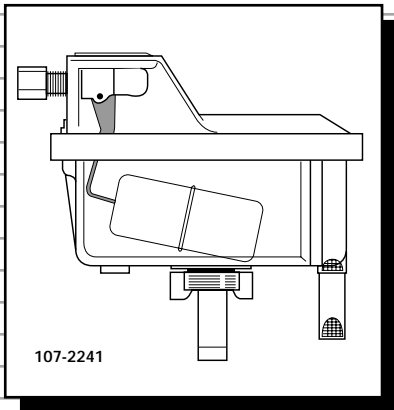

107-2221 ASSEMBLY


LIST EACH	PART NUMBER	VERTICAL INLET CONNECTION	FLOW CAPACITY AT 50 PSI	WEIGHT PER EACH
\$27.04	107-2221	1/4" COMP. WING NUT BRASS BODY	.52 GPM	.6 LBS

107P-2221 ASSEMBLY

LIST EACH	PART NUMBER	VERTICAL INLET CONNECTION	FLOW CAPACITY AT 50 PSI	WEIGHT PER EACH
\$25.75	107P-2221	1/4" COMP. WING NUT CELCON BODY	.52 GPM	.6 LBS

107-2241 ASSEMBLY

LIST EACH	PART NUMBER	HORIZONTAL INLET CONNECTION	FLOW CAPACITY AT 50 PSI	WEIGHT PER EACH
\$25.84	107-2241	1/4" COMP. NUT COMBO BODY	.52 GPM	.5 LBS

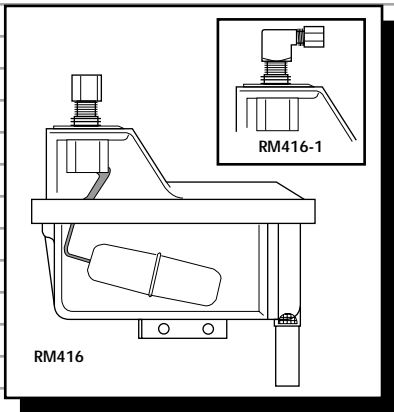

FOR ICEMAKING MACHINES WITH LARGER CAPACITIES

• NATIONAL SANITATION FOUNDATION TESTING LABORATORY listed as Food Service Equipment • All plastic materials FDA approved • Polycarbonate Reservoir • All models - Length 6" - Height 4-3/4" - Width 3-1/2" • Packed 35 pieces per carton


RM416 ASSEMBLY

LIST EACH	PART NUMBER	VERTICAL INLET CONNECTION	FLOW CAPACITY AT 50 PSI	WEIGHT PER EACH
\$34.88	RM416	1/4" COMP. NUT BRASS BODY	.52 GPM	.8 LBS

RM416-1 ASSEMBLY

LIST EACH	PART NUMBER	VERTICAL INLET CONNECTION	FLOW CAPACITY AT 50 PSI	WEIGHT PER EACH
\$37.33	RM416-1	1/4" COMP. ELBOW BRASS BODY	.52 GPM	.8 LBS

BOBBY® VALVES FOR RESERVOIR ASSEMBLIES & ACCESSORIES



RM292 & RM292P SERIES

NSF LISTED

VERTICAL INLET W/ALL BRASS BODY & STAINLESS STEEL ARM

LIST EACH	PART NUMBER	INLET CONNECTION	RESERVOIR ASSEMBLY	ORIFICE	WEIGHT
\$6.99	RM292-1	1/4" COMP. NUT	107-2211	.052	.3 LBS
\$7.96	RM292-2	1/4" COMP. WING NUT	107-2221	.052	.3 LBS


VERTICAL NICKEL PLATED INLET W/CELCON BODY & STAINLESS STEEL ARM

\$6.66	RM292P	1/4" COMP. NUT	107P-2211	.063	.3 LBS
\$7.58	RM292P-1	1/4" COMP. WING NUT	107P-2221	.063	.3 LBS

HORIZONTAL INLET " BOBBY COMBO"

\$6.99	RM292-12	1/4" COMP. NUT	107-2241	.052	.3 LBS
--------	----------	----------------	----------	------	--------

RM292-1 and RM292-2 use PF33 float. RM292P, RM292P-1, and RM292-12 use PF29S-1 float.

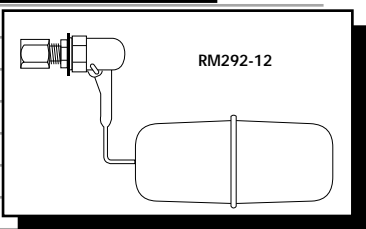

BOBBY® VALVES FOR RESERVOIR ASSEMBLIES & ACCESSORIES

RM292 SERIES

NSF LISTED

VERTICAL INLET W/ALL BRASS BODY & STAINLESS STEEL ARM

LIST EACH	PART NUMBER	INLET CONNECTION	RESERVOIR ASSEMBLY	ORIFICE	WEIGHT
\$8.11	RM292-9A-1	1/4" COMP. NUT	RM416	.052	.3 LBS
\$8.11	RM292-25A	1/8" MIP	RM416-1	.052	.3 LBS

RM296 SERIES

VERTICAL INLET PLASTIC VALVE FOR 1/4" PLASTIC TUBING, SPLASH GUARD STAINLESS STEEL ARM, AND INLINE FILTER WITH REMOVABLE STAINLESS MESH SCREEN

LIST EACH	PART NUMBER	INLET CONNECTION	ORIFICE	WEIGHT
\$12.90	RM296-1	1/4" COMP.	.052	.4 LBS
\$12.90	RM296-2	1/4" COMP.	.093	.4 LBS





61W FORGED WING NUT

LIST EACH	PART NUMBER	INLET CONNECTION	WEIGHT
\$1.60	61W	1/4" COMP.	.1 LBS


R500-1/4

PLASTIC INLINE FILTER FOR 1/4" PLASTIC TUBING WITH REMOVABLE STAINLESS MESH SCREEN

LIST EACH	PART NUMBER	INLET & OUTLET CONNECTION	WEIGHT
\$5.79	R500-1/4	1/4" COMP.	.05 LBS



INSTALLATION INSTRUCTIONS

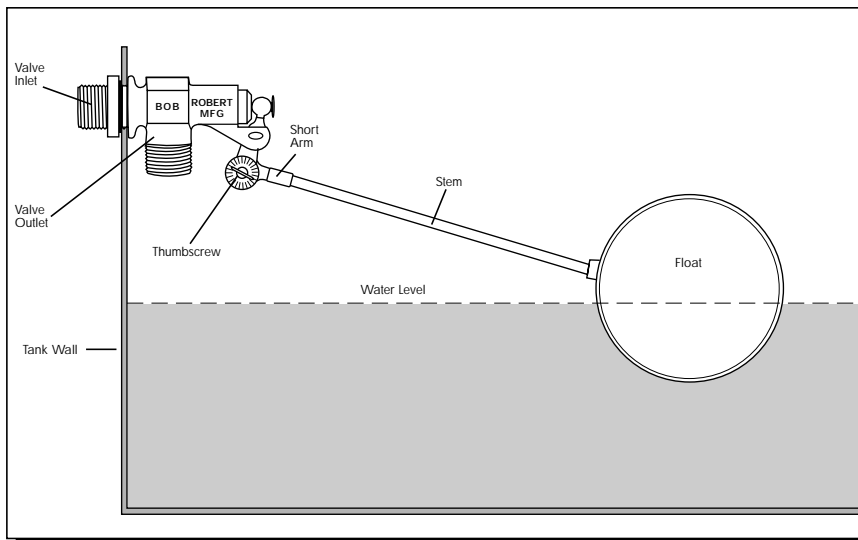

1. Attach valve to tank wall and connect valve inlet to water supply.
2. Valve outlet must be 90° to water level for bind-free operation.
3. Screw stem and float to short arm.
4. Rotate arm and stem for desired water level, tighten short arm thumbscrew.

LIMITED WARRANTY

Products manufactured by Robert Manufacturing are made to conform to all applicable codes and standards in the United States and Canada. When properly installed and cared for, they can be expected to give lengthy service. However, due to Robert's lack of control over the environment in which its' products will be used and over the installation of its' products, the warranty on our products is limited to a **five year replacement warranty**. Any Robert product will be repaired or replaced at our option within five years of the date of its' first installation into service. No other warranty, expressed or implied, is made with regard to products of Robert Manufacturing.

QUESTIONS?
TECHNICAL ADVICE?
CONTACT OUR APPLICATIONS DEPARTMENT.
(800) 877-6237